

Las
er
Cut

1.25"

1.5"

STAINLESS STEEL TAGS "lasered"

.75" x 3"

46

45

THIS ALARM IS ONLY LOCAL IN CASE OF FIRE PHONE

911

UNDERGROUND CONDUCTORS

CIRCUIT I.D. FEED FROM CSTE
YEAR INSTALLED 2011
DIAGRAM B4-1 DETAIL 1 TABLE D8B
SIZE/TYPE OF CONDUCTOR 350 MCM CU
AMPACITY 450A MAX. OVERCURRENT 400A

WW-12-VAV-07

Free Quotes

Weather Proof Plastic

LIGHTING RETROFIT

09/06/10

ELECTRICAL RATING

Voltage - 347v
Amperage - 0.30 amps
Wattage - 70 Watts

POWER SWITCH

ON 
OFF 

PANEL FEED
12345678

PANEL C cct. 43

PANEL C cct. 45

PANEL C cct. 70

PANEL C cct. 70

PANEL C cct. 72

PANEL C cct. 42

PANEL C cct. 40

PANEL C cct. 64

PANEL C cct. 74

PANEL C cct. 76

PANEL C cct. 38

PANEL C cct. 36

PANEL C cct. 78

PANEL C cct. 1

PANEL C cct. 1

PANEL C cct. 1

PANEL C cct. 1

PANEL C cct. 1

PANEL C cct. 1

PANEL C cct. 1

PANEL C cct. 1

PANEL C cct. 1

PANEL C cct. 1

PANEL C cct. 1

PANEL C cct. 1

PANEL C cct. 1

PANEL C cct. 1

PANEL C cct. 1

PANEL C cct. 1

PANEL C cct. 1



CM ENGRAVE

MOST COMMON COLORS IN STOCK

BLACK / WHITE TEXT

WHITE / BLACK TEXT

WHITE / RED TEXT

YELLOW / BLACK TEXT

BLUE / WHITE TEXT

GREEN / WHITE TEXT

RED / WHITE TEXT

WHITE / BLUE TEXT

MORE TO CHOOSE FROM


ORANGE / WHITE TEXT

SILVER / BLACK TEXT

PLUS WE CARRY
 WEATHER PROOF PLASTIC
 3MM PLASTIC

LARGE SELECTION OF COLORED ALUMINUM

LASER

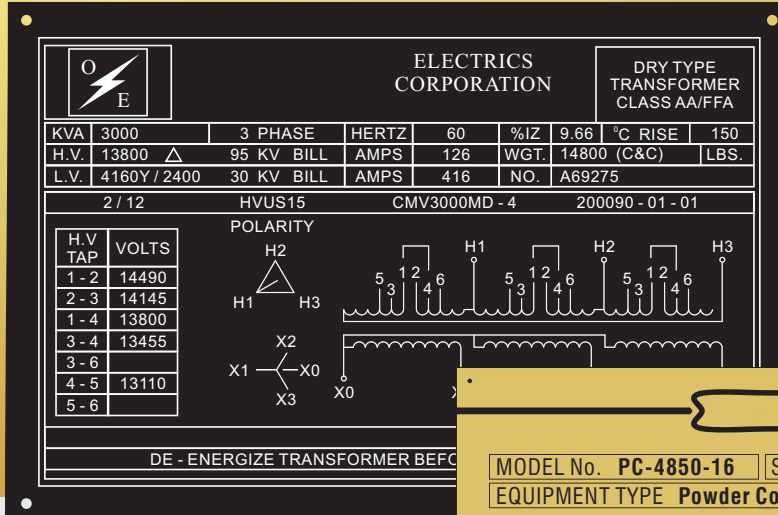

ROTARY
 &
 DIAMOND
 ENGRAVING

UNDERGROUND CONDUCTORS

CIRCUIT I.D. FEED FROM CSTE

YEAR INSTALLED 2011

DIAGRAM B4-1 DETAIL 1 TABLE D8B

SIZE/TYPE OF CONDUCTOR 350 MCM CU

AMPACITY 450A MAX. OVERCURRENT 400A

MODEL No. PC-4850-16	SERIAL No. 20121050
EQUIPMENT TYPE Powder Coat Oven	DATE 10/18/2012
VOLTAGE 240v	PH. 1 AMPS 105a
CONTROL VOLTAGE 120vac. 24vac. 24vdc.	
FUEL TYPE Nat. Gas	BTU'S 745,000
SUPPLY PRES. 3.5 inches	MIN. MANIFOLD PRES. 2 inches
MAX. MANIFOLD PRES. 3.5	MAX. OVEN TEMP 500 deg
EXHAUST FAN CFM 1200	MAKEUP AIR CFM 4500
PURGE TIME 2 min.	RECIRC. FAN CFM 1200
PUMP #1 GPM 73	MAX. SPRAY PRES. 5 psi
PUMP #2 GPM 73	MIN. SPRAY PRES. 2 psi